


EXHIBIT B

Existing roof vents are identified by photos and descriptions below and should be either replaced or retained as specifically stated under each photo.



Each of the six (6) existing roof vents like that pictured above, is to be removed and replaced with a with new Lomanco Whirlybird Turbine Ventilator, Model BIB-12, Color – Mill Finish, or pre-approved equivalent.

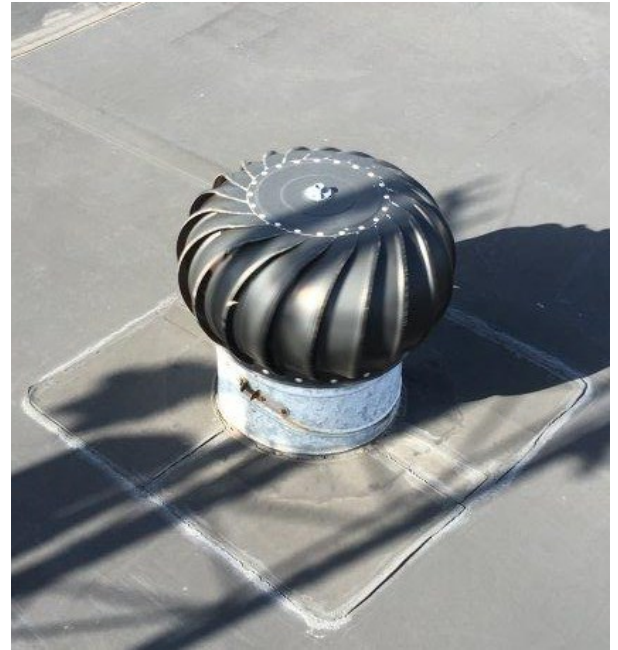

Each of the seventeen (17) existing roof vents like that pictured above, is to be removed and replaced with a with new Lomanco Whirlybird Turbine Ventilator, Model BIB-12, Color – Mill Finish, or pre-approved equivalent.



The one (1) existing vent pictured above, is to be retained. It may be removed during the roofing process and then replaced once the new roofing system has been installed, ensuring a weather-tight seal.



The two (2) existing vents pictured above, are to be retained. The new roofing system should be installed to ensure a weather-tight seal around each vent.